

網路下載驅動程式安裝流程

1. 請開啟 IE  輸入網址 www.ricoh.com.tw

2.



出現上面圖式，按下**下載服務**

3.

下載服務



多功能事務機



[驅動程式](#)

[操作說明手冊](#)

[產品型錄](#)

雷射印表機



[驅動程式](#)

[操作說明手冊](#)

[產品型錄](#)

快速印刷機



[驅動程式](#)

[操作說明手冊](#)

[產品型錄](#)

按下左邊**驅動程式**

5. 選擇機種您現在目前使用機型:範例如下 **MP C2551** 再按 **Go**

Drivers / Software

Multifunctionals

Colour Multifunctionals

Select Model

Aficio™MP C4502
Aficio™MP C4502A
Aficio™MP C5000
Aficio™MP C5501A
Aficio™MP C5502
Aficio™MP C5502A
Aficio™MP C6000
Aficio™MP C6501SP
Aficio™MP C7500
Aficio™MP C7501SP
Aficio™SP C210SF
MP C2003SP
MP C2503SP
MP C3003SP
MP C3503SP
MP C4503SP
MP C5503SP
MP C6003SP
MP C6502SP
MP C8002SP

Go

Go

Go

Go

[↑ Page Top](#)

6. 選擇語言 **1.Traditional Chinese(繁體中文)** 再接著選擇您的作業系統版本與 **32** 或 **64** 位元
以下用 **WIN7** 系統為範例:

Choose a driver language from the drop down list.


Traditional Chinese

Choose your Operating System:

- [Microsoft Windows Server 2008](#)
- [Microsoft Windows Server 2008 R2 \(x64\)](#)
- [Microsoft Windows Server 2008 \(x64\)](#)
- [Microsoft Windows Server 2003](#)
- [Microsoft Windows Server 2003 x64 Edition](#)
- [Microsoft Windows 7](#)**
- [Microsoft Windows 7 \(x64\)](#)
- [Microsoft Windows Vista](#)
- [Microsoft Windows Vista \(x64\)](#)
- [Microsoft Windows XP](#)
- [Microsoft Windows XP x64 Edition](#)
- [Microsoft Windows 2000](#)
- [Mac OS X v10.5](#)
- [Mac OS X v10.1-10.4](#)
- [Mac OS](#)

7. 選 LANFAX Driver 為列印驅動程式 再按下 Download 箭頭下載

下載完成請將檔案解壓縮

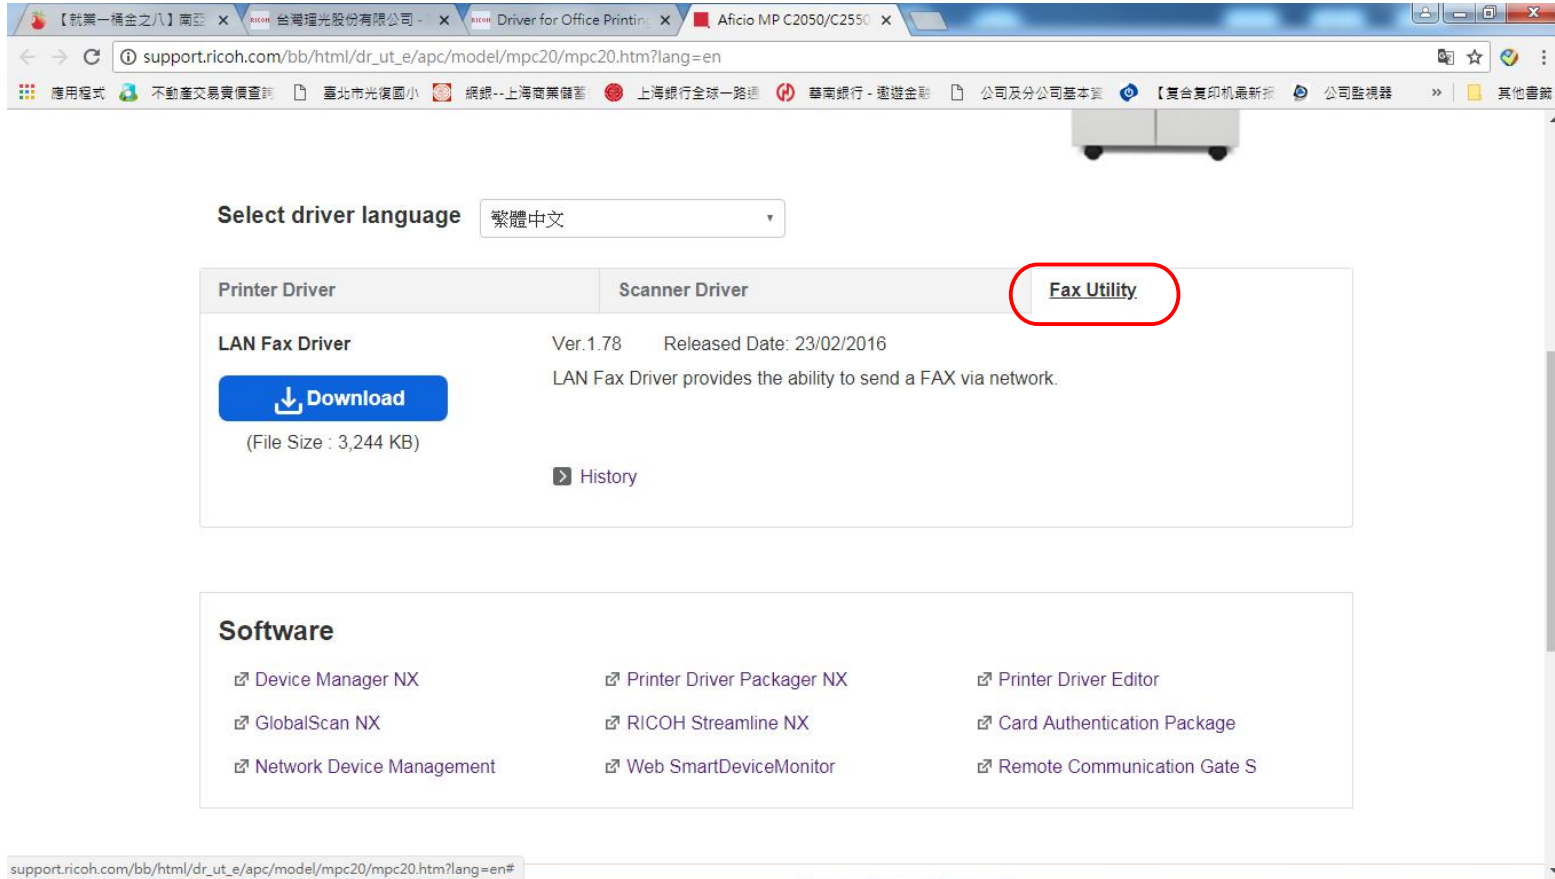

The screenshot shows a web browser window with the URL support.ricoh.com/bb/html/dr_ut_e/apc/model/mpc20/mpc20.htm?lang=en. The page is titled "Select driver language" and has a dropdown menu set to "繁體中文". Below this, there are three tabs: "Printer Driver", "Scanner Driver", and "Fax Utility". The "Fax Utility" tab is highlighted with a red circle. Under the "Fax Utility" tab, the "LAN Fax Driver" is listed with a "Download" button (file size: 3,244 KB) and a "History" link. Below the "Software" section, there are several links for other software: Device Manager NX, GlobalScan NX, Network Device Management, Printer Driver Packager NX, RICOH Streamline NX, Web SmartDeviceMonitor, Printer Driver Editor, Card Authentication Package, and Remote Communication Gate S.

Select driver language 繁體中文


Printer Driver	Scanner Driver	Fax Utility
LAN Fax Driver ↓ Download (File Size : 3,244 KB)	Ver.1.78 Released Date: 23/02/2016 LAN Fax Driver provides the ability to send a FAX via network. ▶ History	

Software


- Device Manager NX
- GlobalScan NX
- Network Device Management
- Printer Driver Packager NX
- RICOH Streamline NX
- Web SmartDeviceMonitor
- Printer Driver Editor
- Card Authentication Package
- Remote Communication Gate S

support.ricoh.com/bb/html/dr_ut_e/apc/model/mpc20/mpc20.htm?lang=en#


8. 於[控制台]→[印表機和傳真]，點選[新增印表機]，按[下一步]

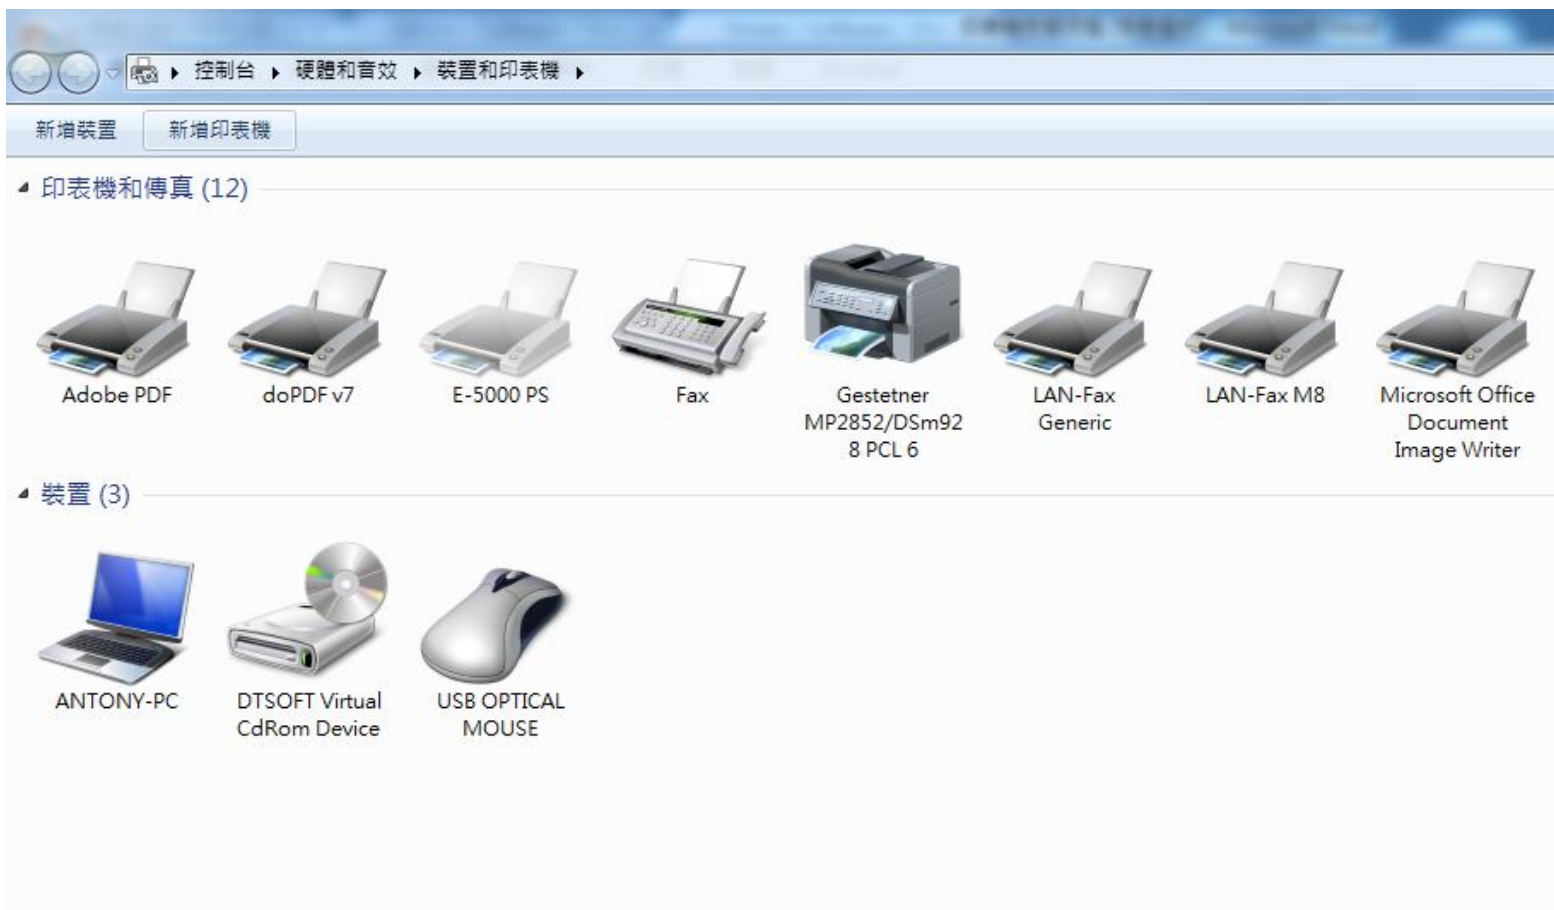

9. 選[新增本機印表機]，按[下一步]

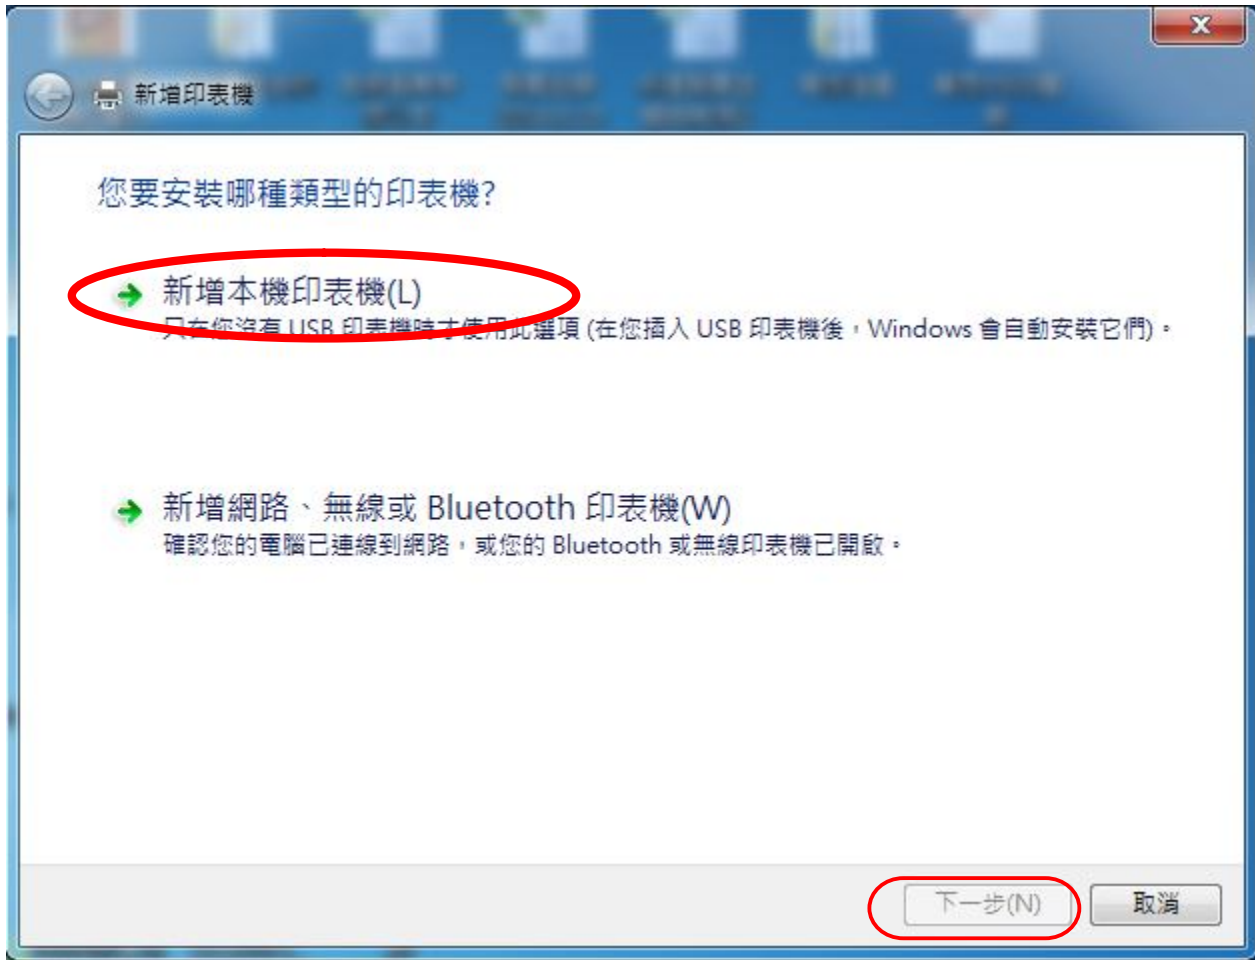

10. 選[建立新的連接埠]→” Standard TCP/IP Port” ， 按[下一步]

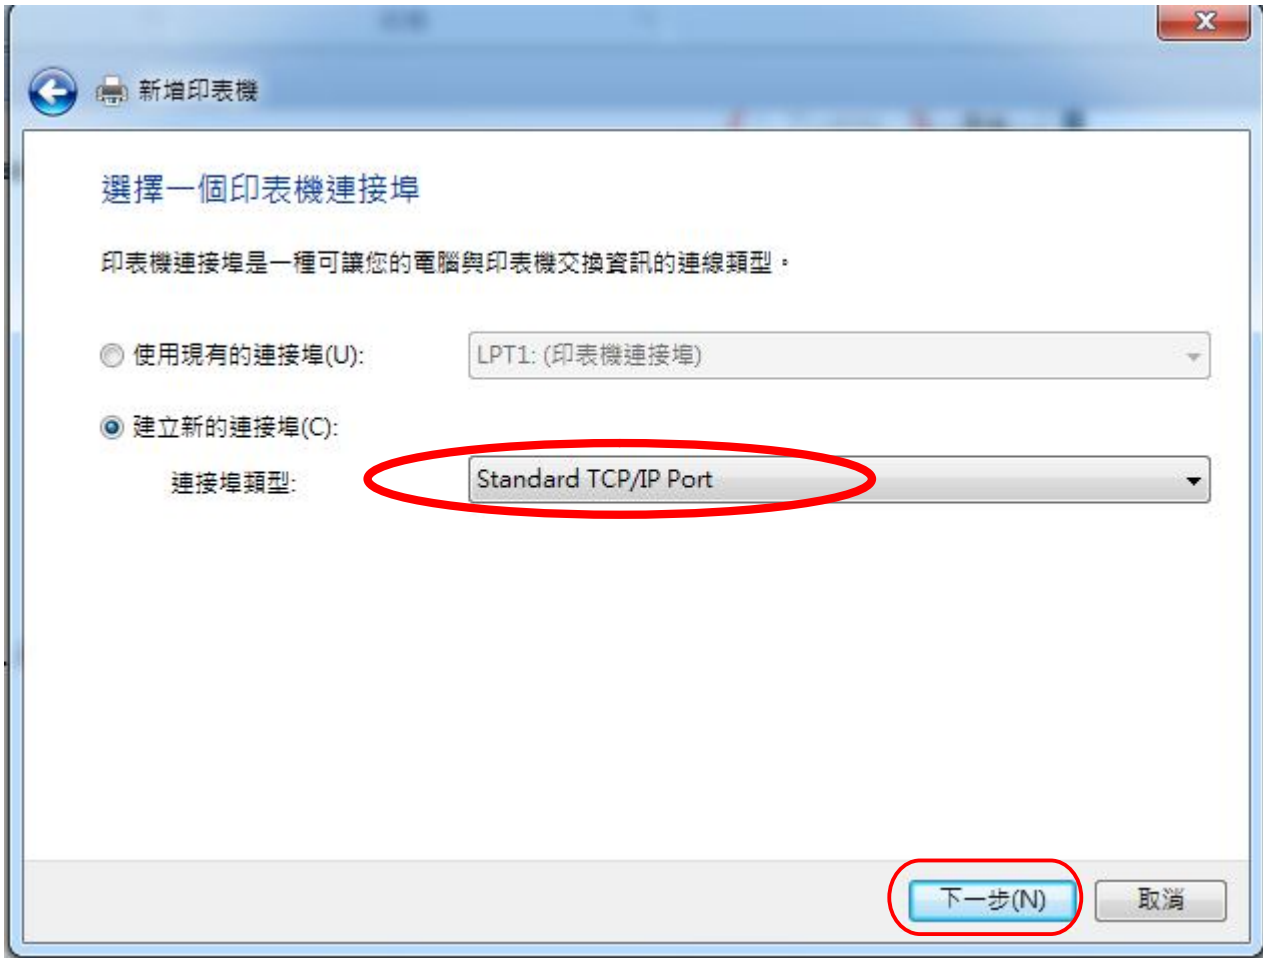

11. 輸入影印機 IP (以下用 192.168.1.150 做範例)，按[下一步]

新增印表機

輸入印表機位址

裝置類型(T): TCP/IP 裝置

主機名稱或 IP 位址(A): 192.168.1.150


連接埠名稱(P): 192.168.1.150

查詢印表機並自動選取要使用的驅動程式(Q)


取消方塊勾選地方(重要)

下一步(N) 取消


12. 著選取驅動程式的位置，[從磁片安裝]，[瀏覽]，選取正確的型號後，按[下一步]

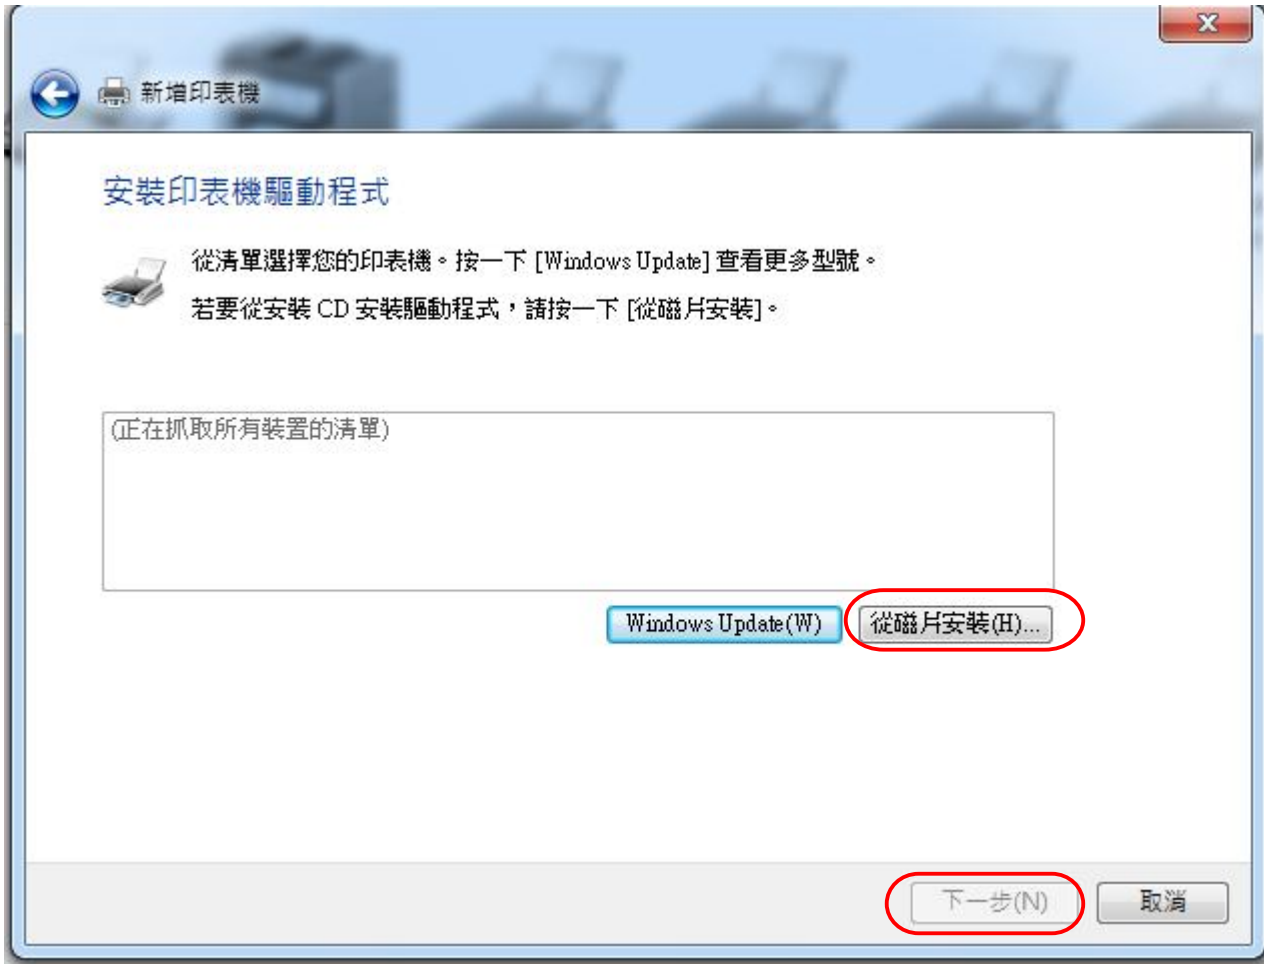


13. 選取瀏覽(B)

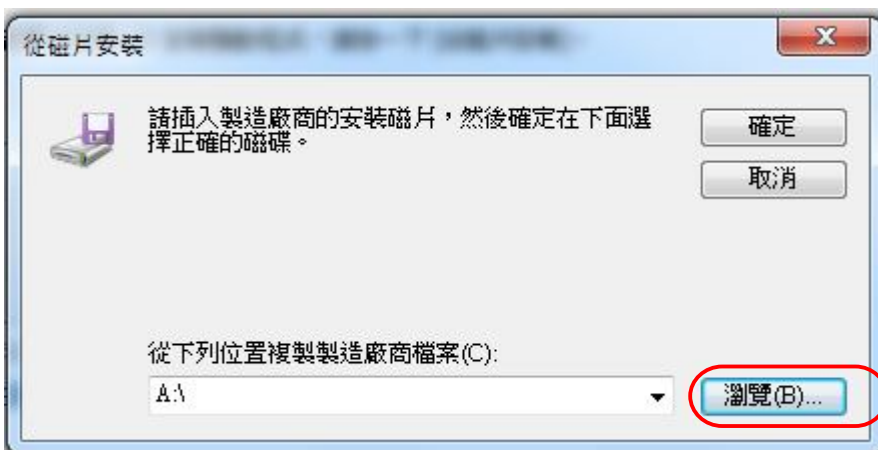


14. 將下載檔案解壓縮完預設儲存路徑在 C:temp 底下

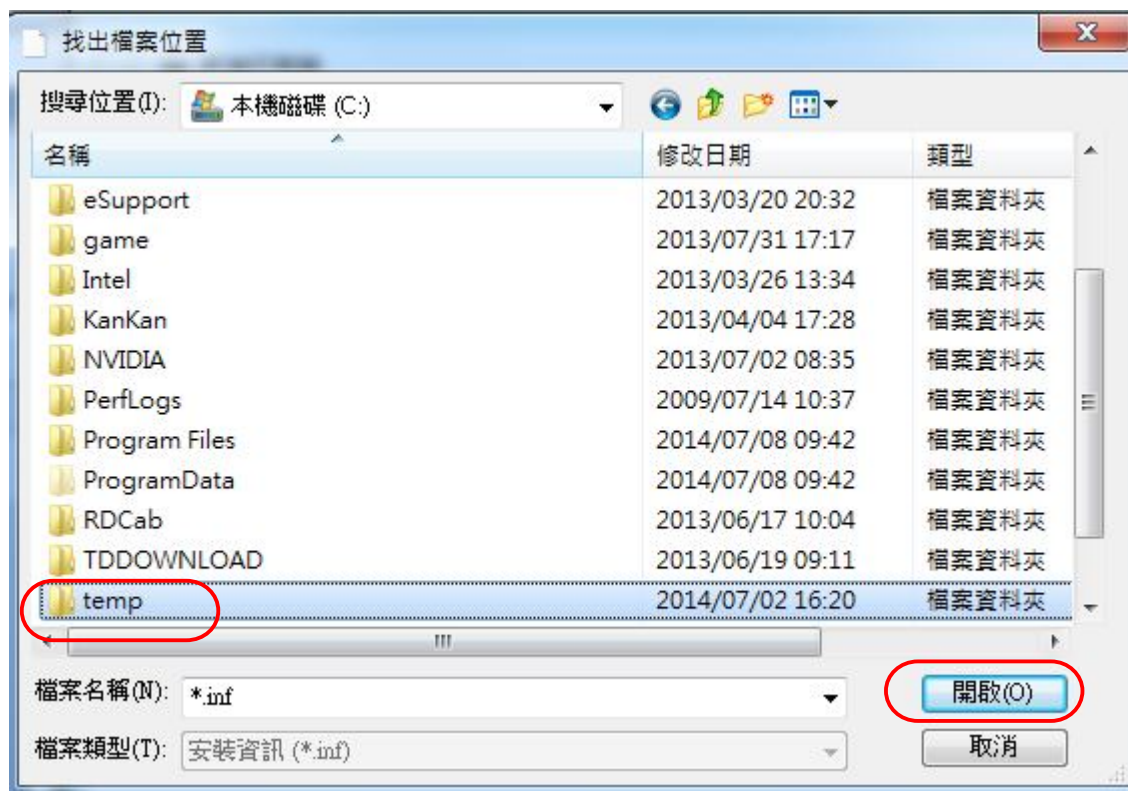


15. 選取解完壓縮資料夾, 接下來案開啟.

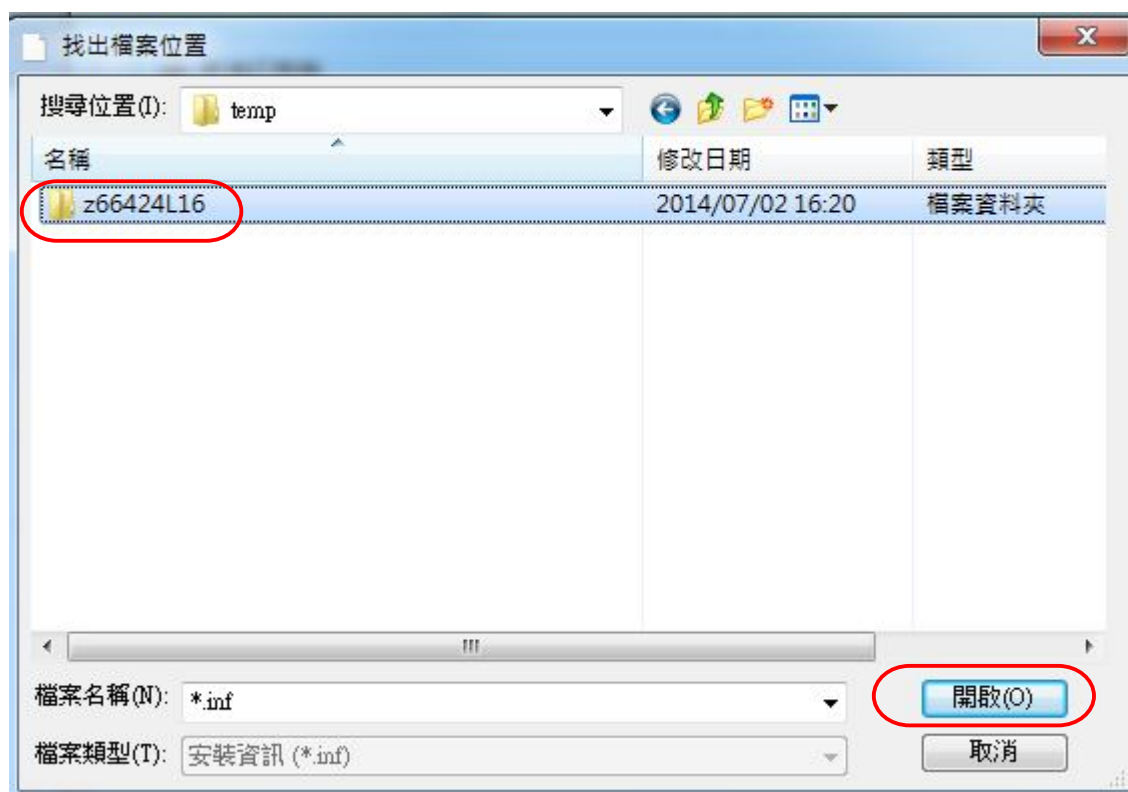


16. 繼續選取 Disk1 接下來案開啟。

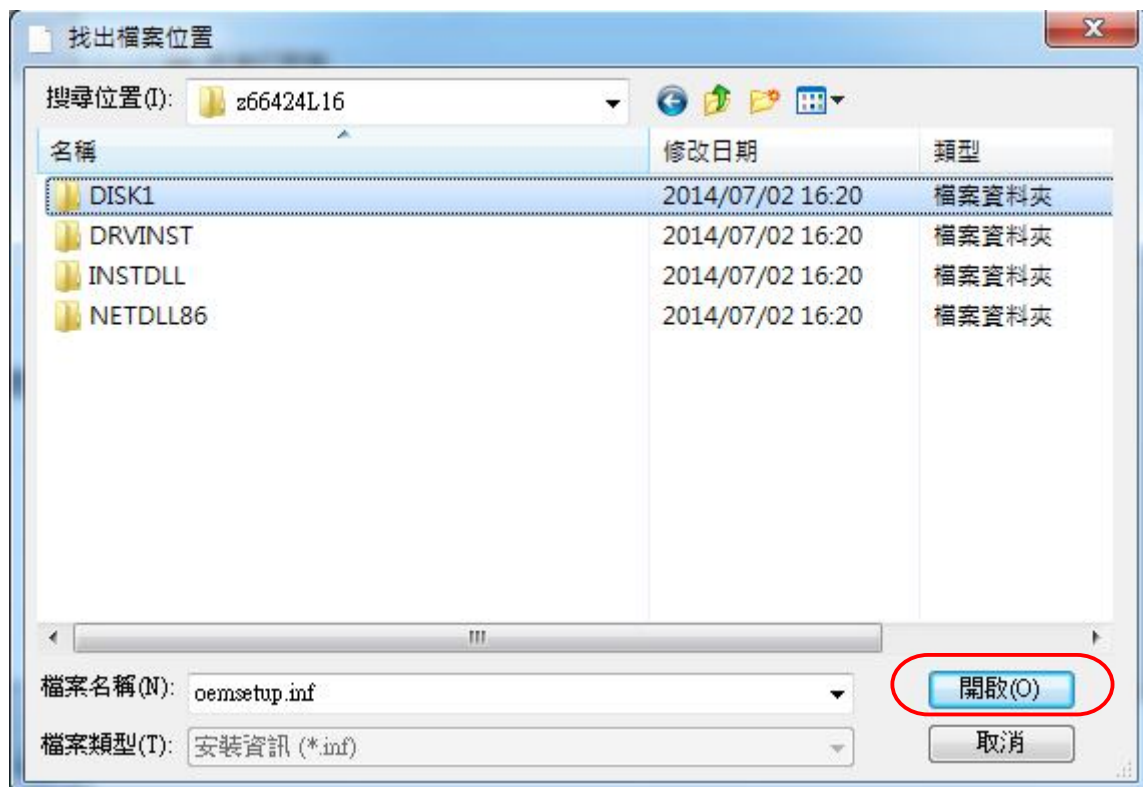

17. 接下來再繼續選取 OEMSETUP

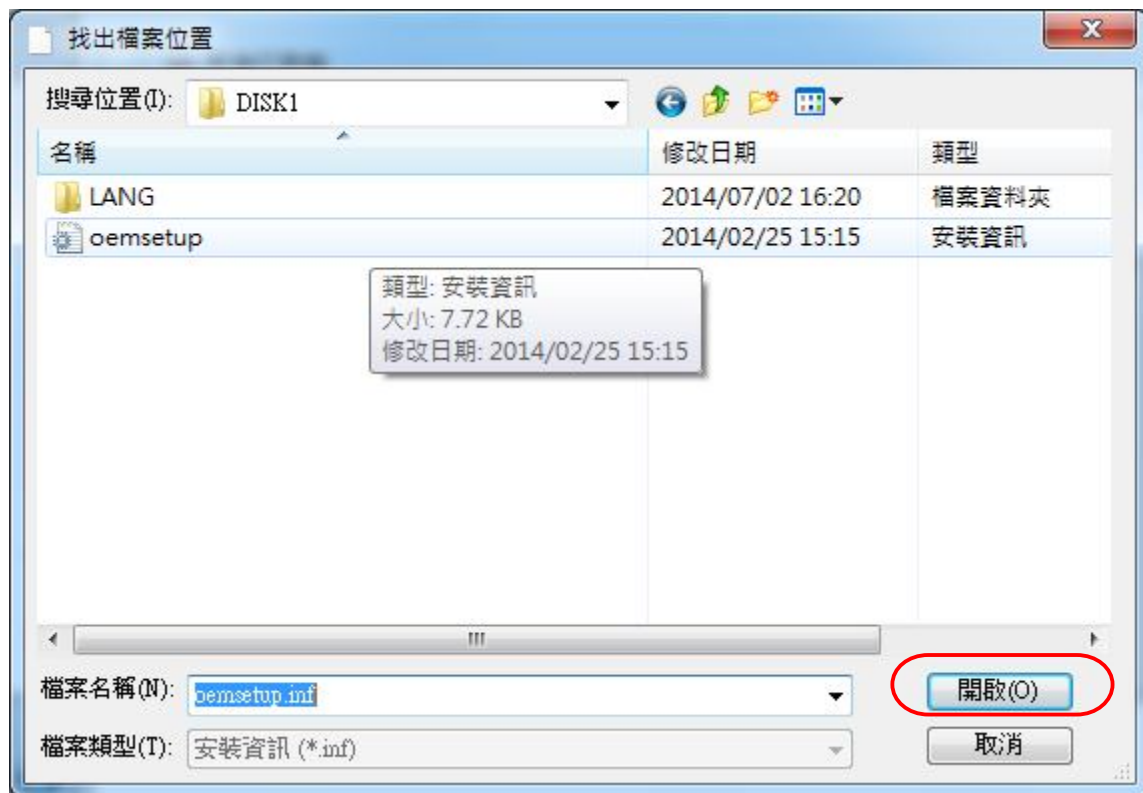


18. 繼續選取確定

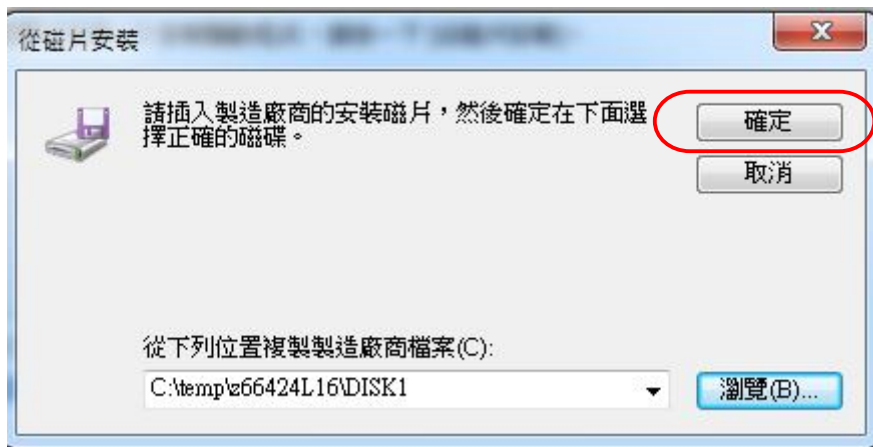

19. 再接下來選擇 LAN-FAX Generic, 再按下一步。



20. 按[下一步]

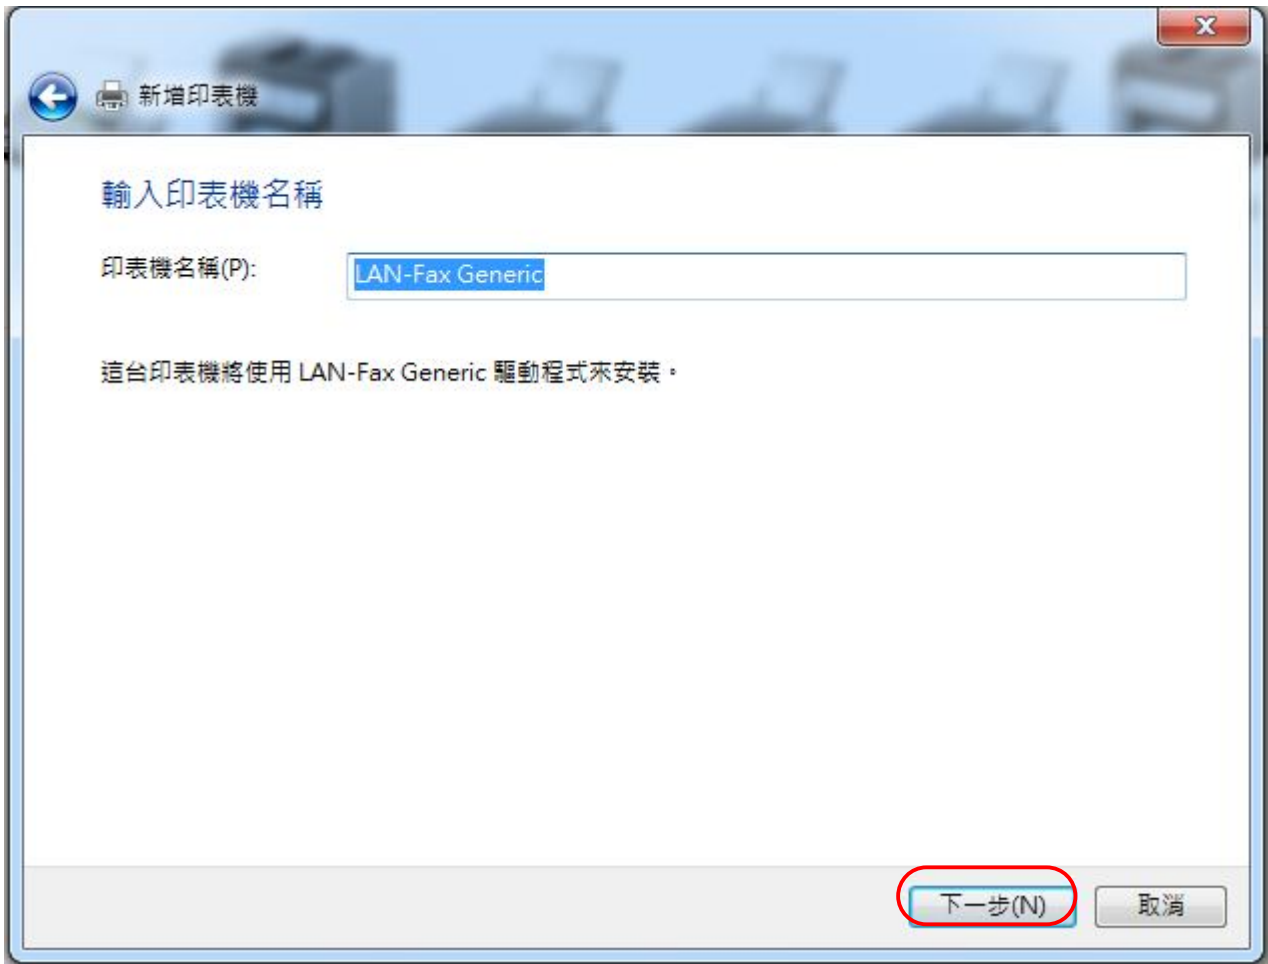

21. 共用印表機設定，按[下一步]



22. LAN-FAX 驅動程式安裝完成，選[完成]

